



Kaili Resources Limited
ABN 19 132 787 654
World Tower
Suite 1312, Level 13
87-89 Liverpool Street
Sydney NSW 2000, Australia

T: +61 2 9241 5658
E: contact@kailigroup.com.au

4th April 2022

ASX Market Announcements

**RC DRILLING RESULTS AT CANEGRASS (EL31/113)
THE GINDALBIE GOLD PROJECT, YILGARN CRATON, WA**

Kaili Resources Limited ("Company") is pleased to announce it has received all results from the 7 hole drilling program completed mid-February 2022 within the Canegrass tenement (**Figure 1**) of the Gindalbie Gold Project in the Yilgarn Craton in Western Australia (WA).

Encouraging results: Elevated gold intersections >0.25 g/t Au were obtained in most drill holes with the southern-most line having 4 m composite intersections of 0.6 g/t Au and 0.5 g/t Au in addition to other intersection to 1 m @ 1.4 g/t Au. These and other 4 m composite intervals >4 m @ 0.25 g/t Au will be resampled as 4 x 1 m samples. The association of a significant regional fault, a competency contrast between the mafic and felsic volcanics and elevated gold/pyrite in the RC drilling indicates further drilling may be warranted once all the data has been reviewed along with all historical data.

Significant gold intervals are shown below:

CGRC001

3 m @ 0.6 g/t 51-53 m including 1 m @ 1.0 g/t 51-52 m

CGRC003

3 m @ 0.38 g/t 69-71 m

CGRC004

1 m @ 0.32 g/t 62-63 m

CGRC006

4 m @ 0.52 g/t (4 m composite to be split into 1 m samples)

CGRC007

4 m @ 0.6 g/t (4 m composite to be split into 1m samples)

1 m @ 0.54 g/t 73-74 m

1 m @ 1.4 g/t 77-78 m

Two 4 m composites in holes CGRC006 and GCRC007 returned significant results over the interval (see above) and will be resampled as 4 x 1 m intervals (CGRC007 – 36-40 m and 64-72m, CGRC006 – 68-76 m and 84-88 m) for a total of 20 x 1 m splits of the original 4m composite samples.

The planned program was for 90 m per hole for a total of 630 m. However, hole CGRC004 was terminated at 72 m due to a high percentage of clay that could not be drilled. That hole was at an adequate depth to

test the target given that all the other drill holes reached their planned depth of 90 m. The RC drilling was a follow up program to the 2020 Aircore drilling program that intersected 1 m @ 3.96 g/t Au¹ on the most southern line in hole CGAC025 that had the same collar as CGRC005 with the holes drilled at 90 degrees and 270 degrees respectively.

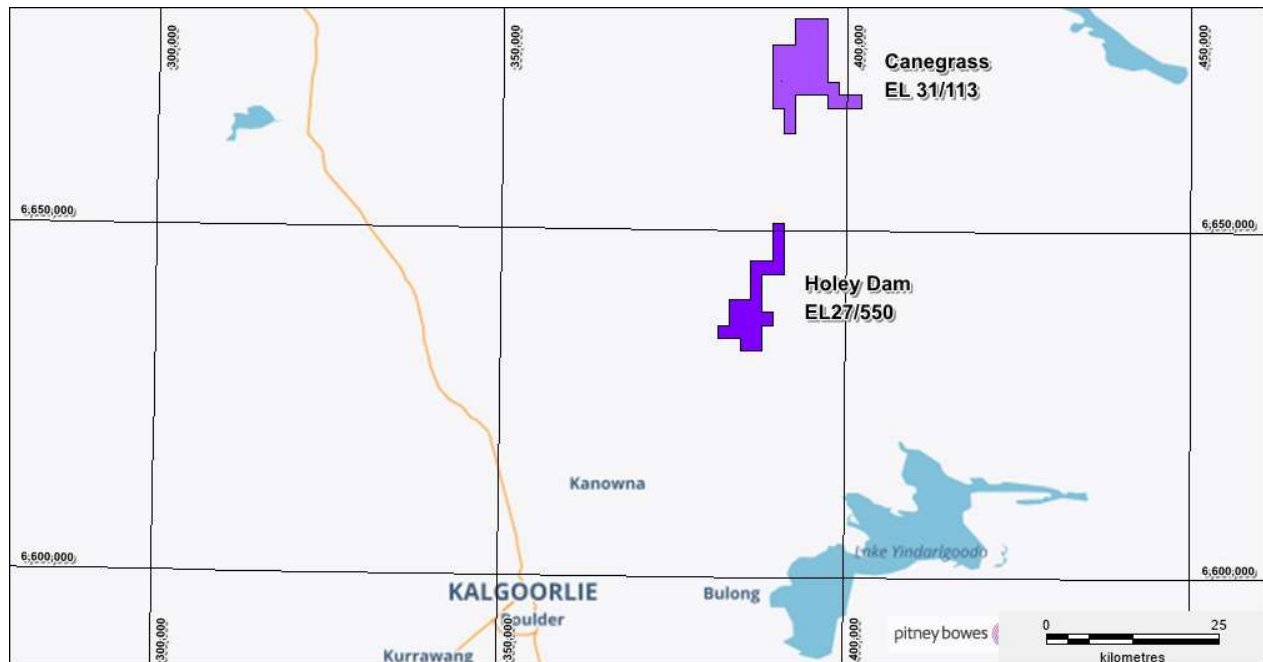


Figure 1: Location of the Gindalbie Gold Project to the NE of Kalgoorlie

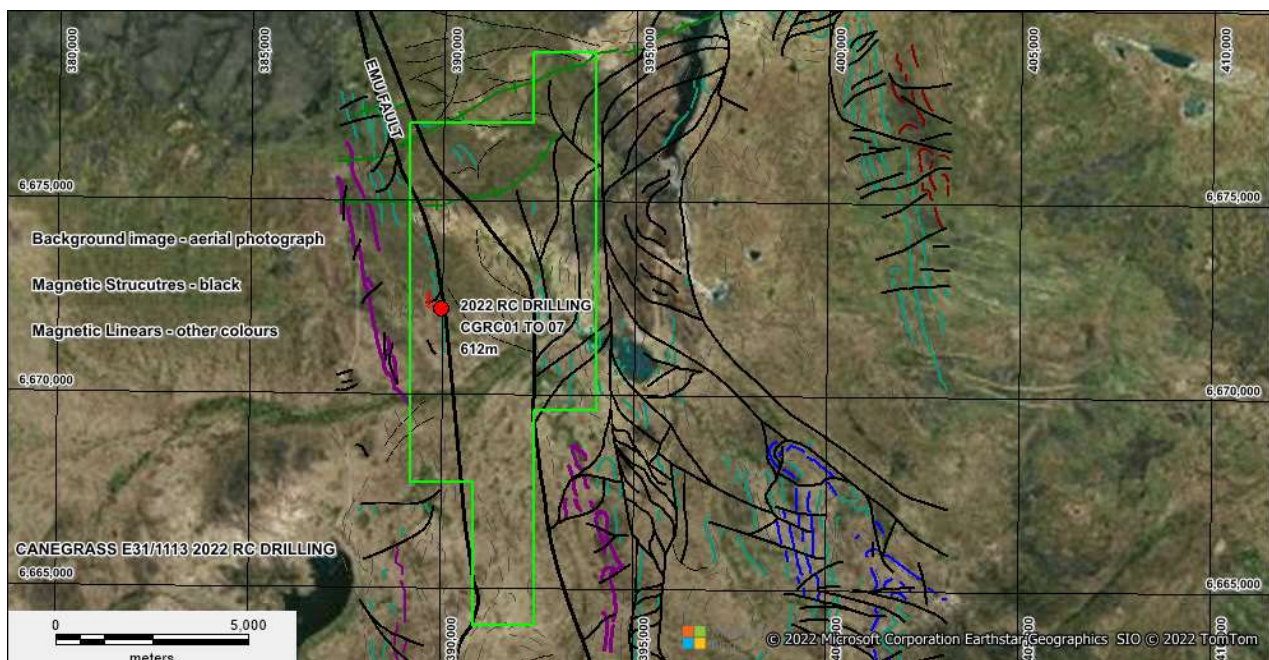


Figure 2: Aerial Imagery with tenure, aeromagnetic structures and RC drilling

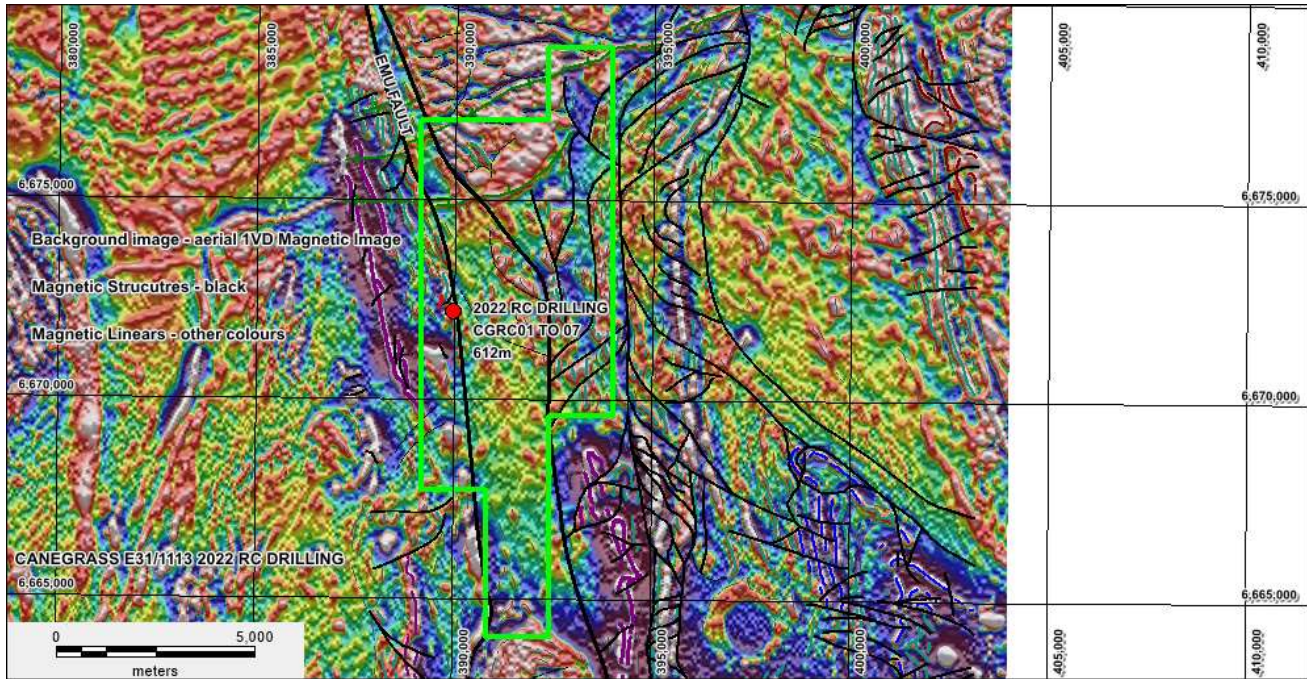


Figure 3: Aeromagnetic Image with tenure, aeromagnetic structures and RC drilling

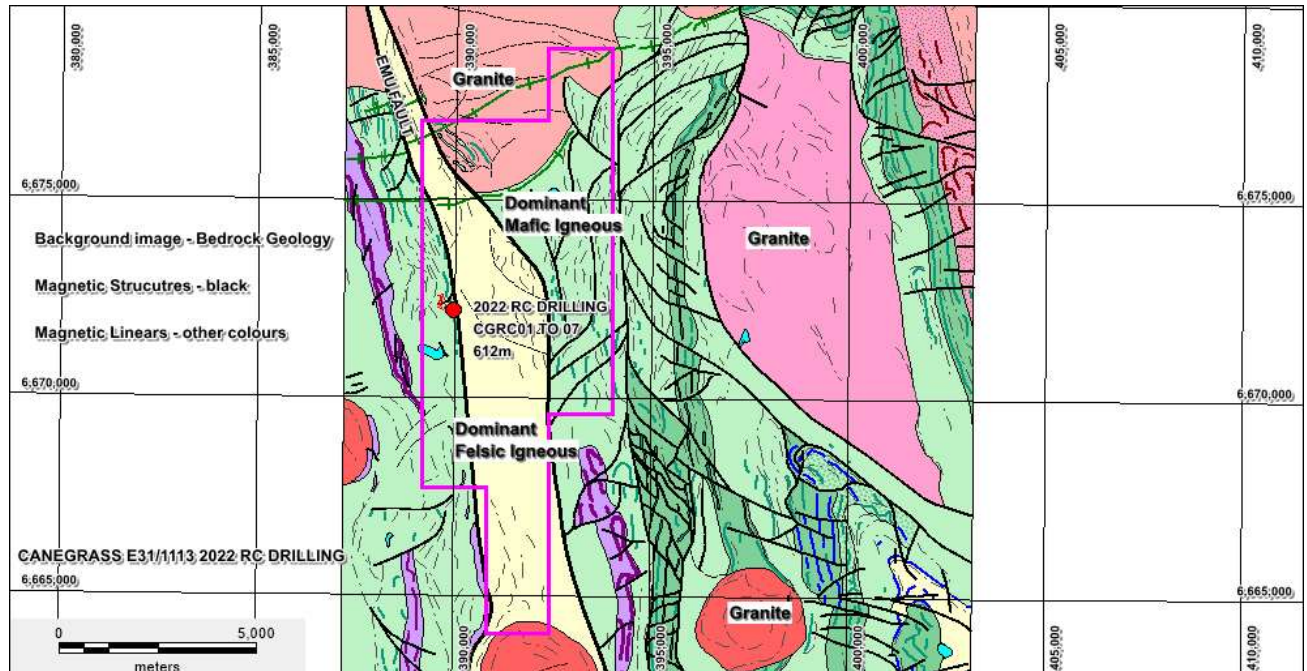


Figure 4: Bedrock Geology with tenure, aeromagnetic structures and RC drilling



Figure 5: RC Drill Collars with significant gold intersections

Northing_GDA94_Zone51	Easting_GDA94_Zone51	Prospect	Hole ID	Tenement	Drill_Type	Depth m	Inclination	Azimuth(magnetic)
6672250	389975	CG_F	CGRC001	Canegrass EPM 31 1113	RC	90	-60	270
6672250	389925	CG_F	CGRC002	Canegrass EPM 31 1113	RC	90	-60	270
6672200	390000	CG_F	CGRC003	Canegrass EPM 31 1113	RC	72	-60	270
6672200	389950	CG_F	CGRC004	Canegrass EPM 31 1113	RC	90	-60	270
6672200	389900	CG_F	CGRC005	Canegrass EPM 31 1113	RC	90	-60	270
6672150	389975	CG_F	CGRC006	Canegrass EPM 31 1113	RC	90	-60	270
6672150	389925	CG_F	CGRC007	Canegrass EPM 31 1113	RC	90	-60	270
						612		

Table 1 RC Drill Collars

The Canegrass area was targeted originally as comprising extensive mafic volcanics and intrusives with an associated regionally significant structure – Emu Fault which is associated with gold mineralisation to the north at the historic Gindalbie Mining Centre. The location of the 2022 RC drilling (**Figure 2 and Table 1**) program is a follow up to the 2020 Aircore Drilling Program which highlighted Area F as an area with elevated gold in the aircore drilling. Southern Geoscience compiled all available open file geophysical data and merged/processed the data. This was followed by an interpretation of structural elements and magnetic lineaments (**Figure 3**). The final phase of the interpretation was to construct a bedrock interpretation of the tenement as shown in **Figure 4**. The interpretation is that the Emu Fault defines the contact between mafic (green) and felsic (yellow) intrusive/extrusive rocks with the prime exploration focus being the mafic dominant lithologies to the west of the Emu Fault. The 2020 aircore drilling intersected 1 m @ 3.96 g/t Au¹ in hole CGAC025 located on the southern-most drill traverses in the Area F grid - 6672000mN. The RC program comprising 7 holes was aimed to test the gold anomalous southern line in addition to drilling 50 m to the north (6672250mN) and south (6672150N) **Figure 5**. Section 6672200 is **Figure 6** and section 6672150 is **Figure 7**.

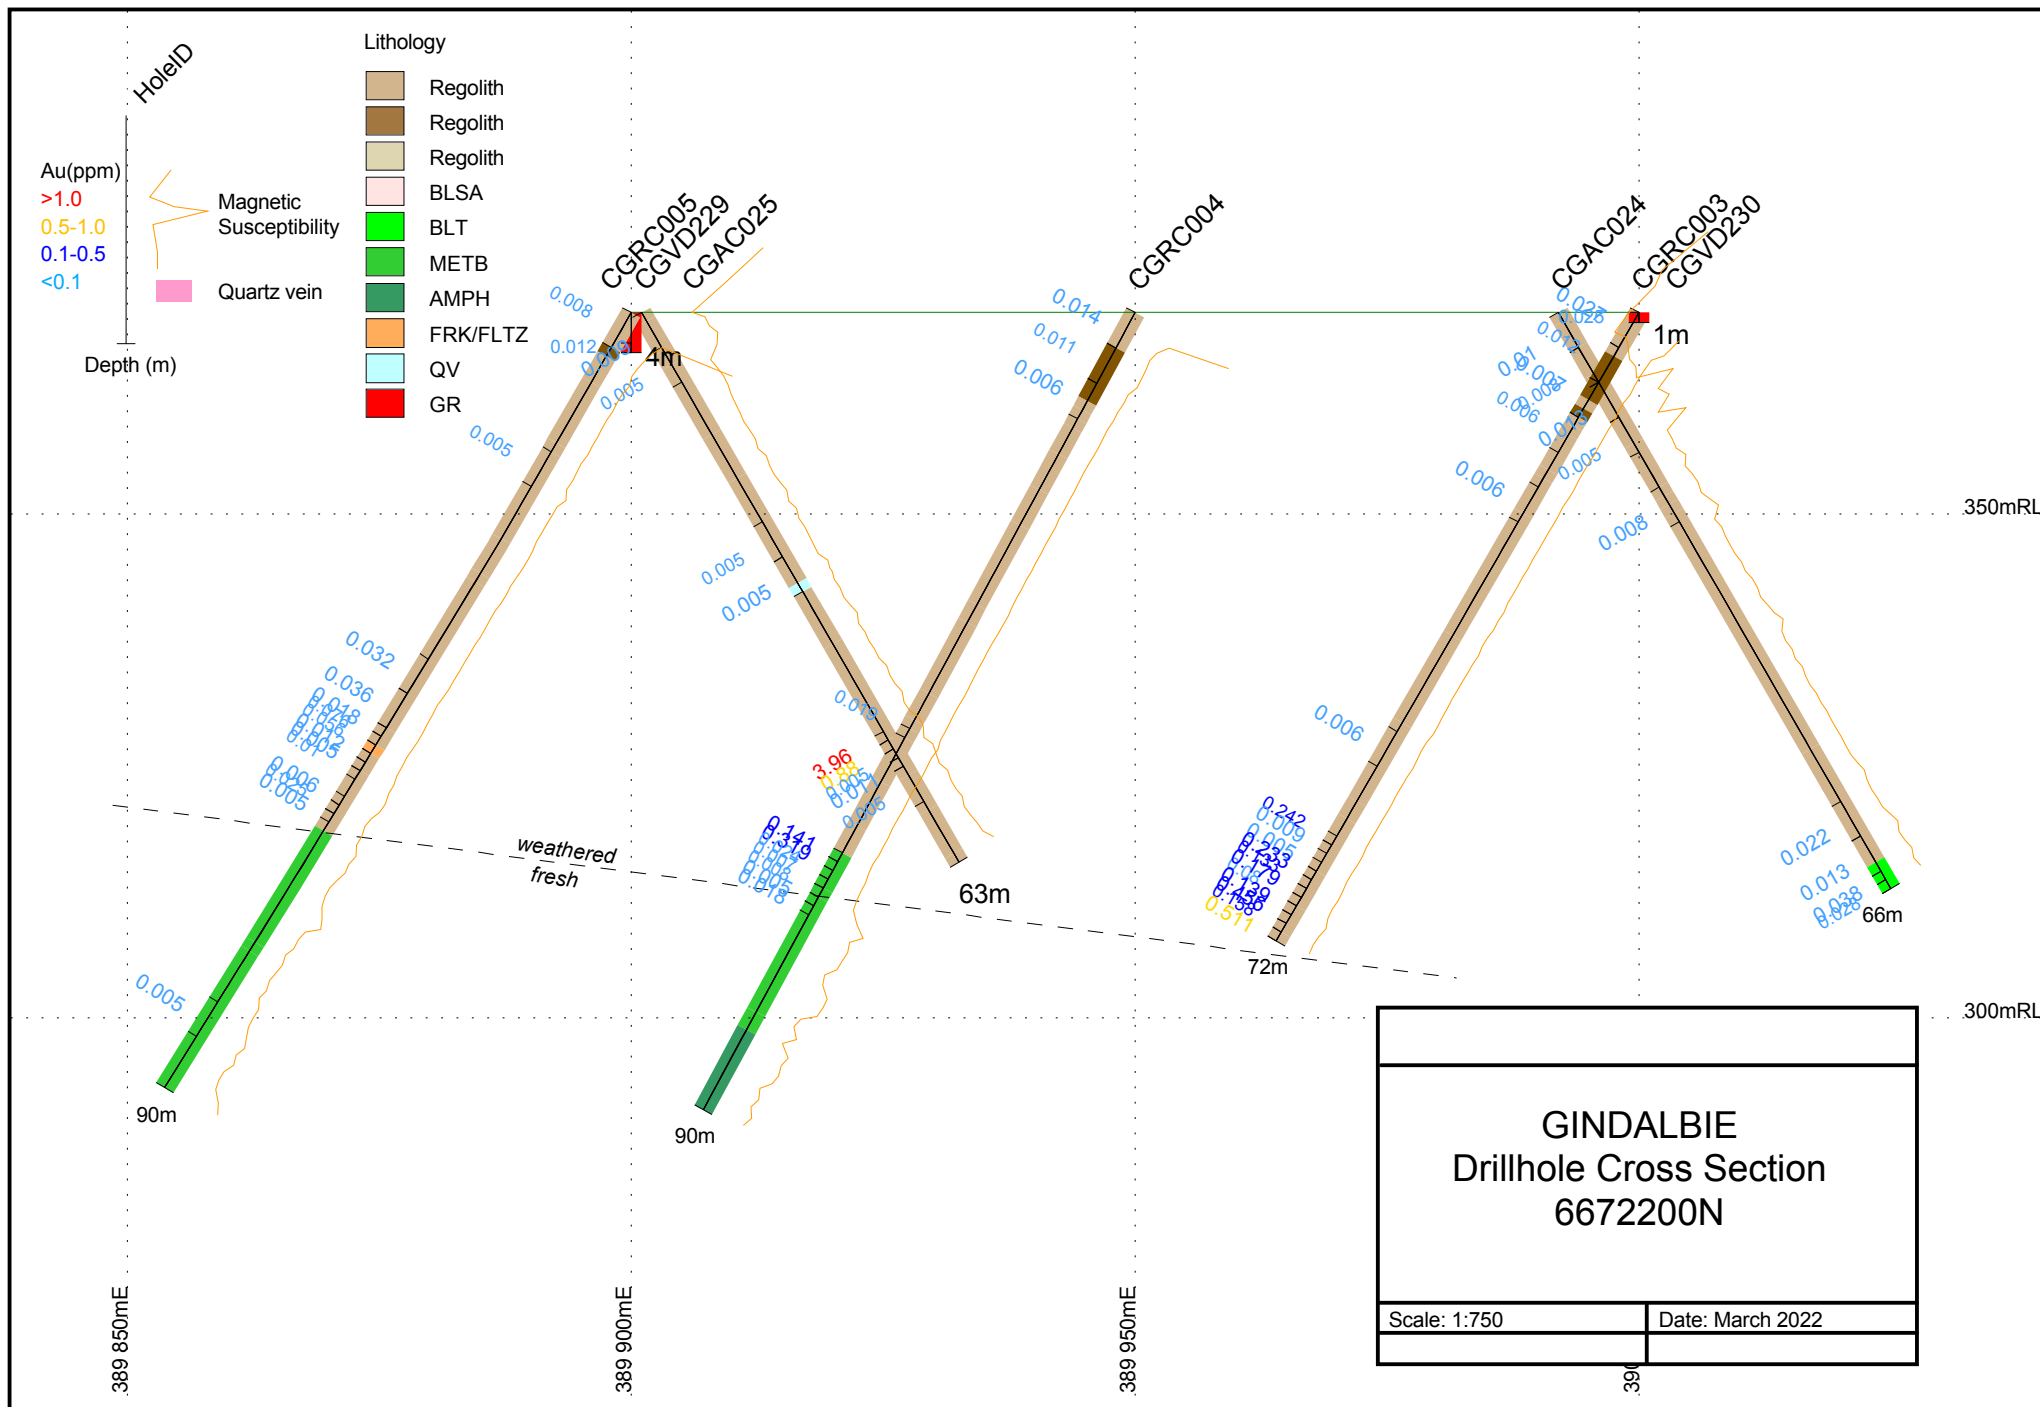


Figure 5 : Cross Section 6672200N

Background

A shallow (average drilling depth of 7 m) vacuum drilling was completed in 2019 (see **ASX Releases of 12th and 17th September 2019**) across the Holey Dam and Canegrass tenements to look for gold geochemical signatures beneath transported overburden. The program was followed by deeper (average depth of 45 m) Aircore drilling in 2020 (see **ASX Releases of 17th and 21st September 2020 and 3rd December 2020**) at 4 target prospects shown in **Figure 2**. Of these 4 targets Prospect CG_F (Canegrass Area F) has been chosen for the current RC drill testing using 3 drill lines.

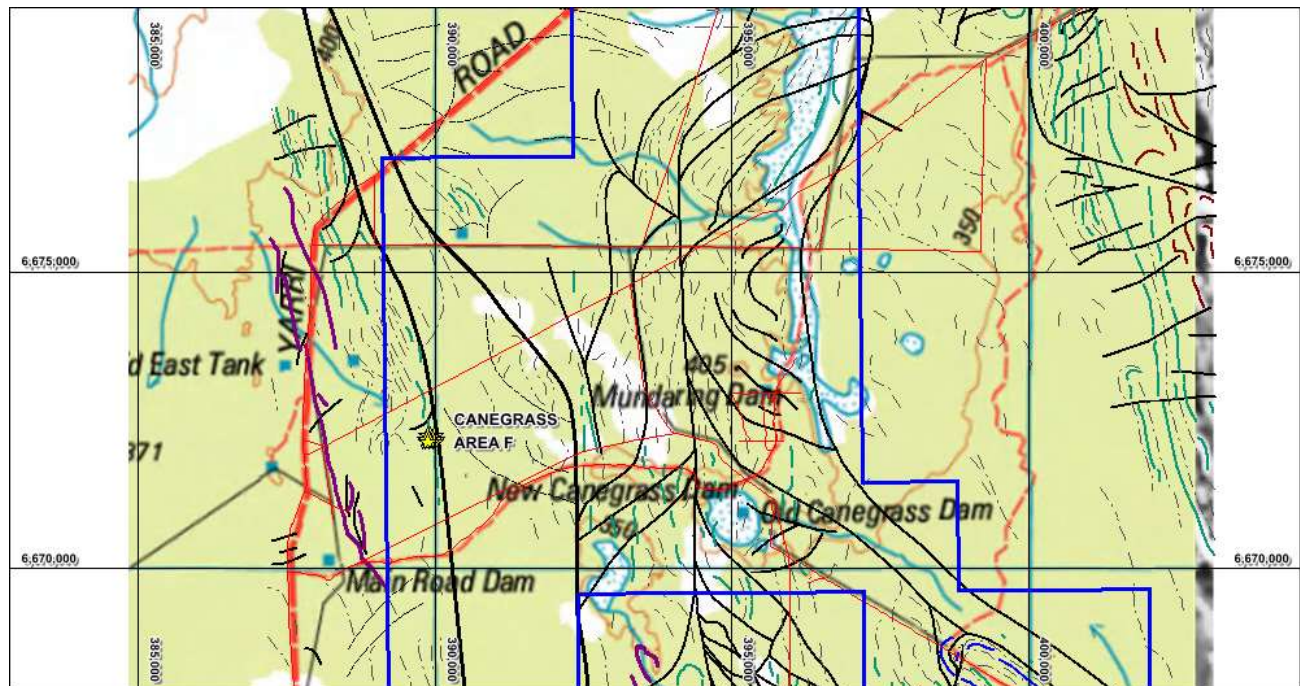


Figure 8: Canegrass CG_F Prospect with structures interpreted from processed aeromagnetics.
Note CG_F is located on the regionally significant Emu Fault

Canegrass Prospect CG_F lies on the Emu Fault shown in **Figure 7** which transgresses the Canegrass tenement from North to South. There is a group of several historical gold workings located to the north and just outside the Canegrass tenement (Gindalbie Workings) and they lie adjacent to the Emu Fault.

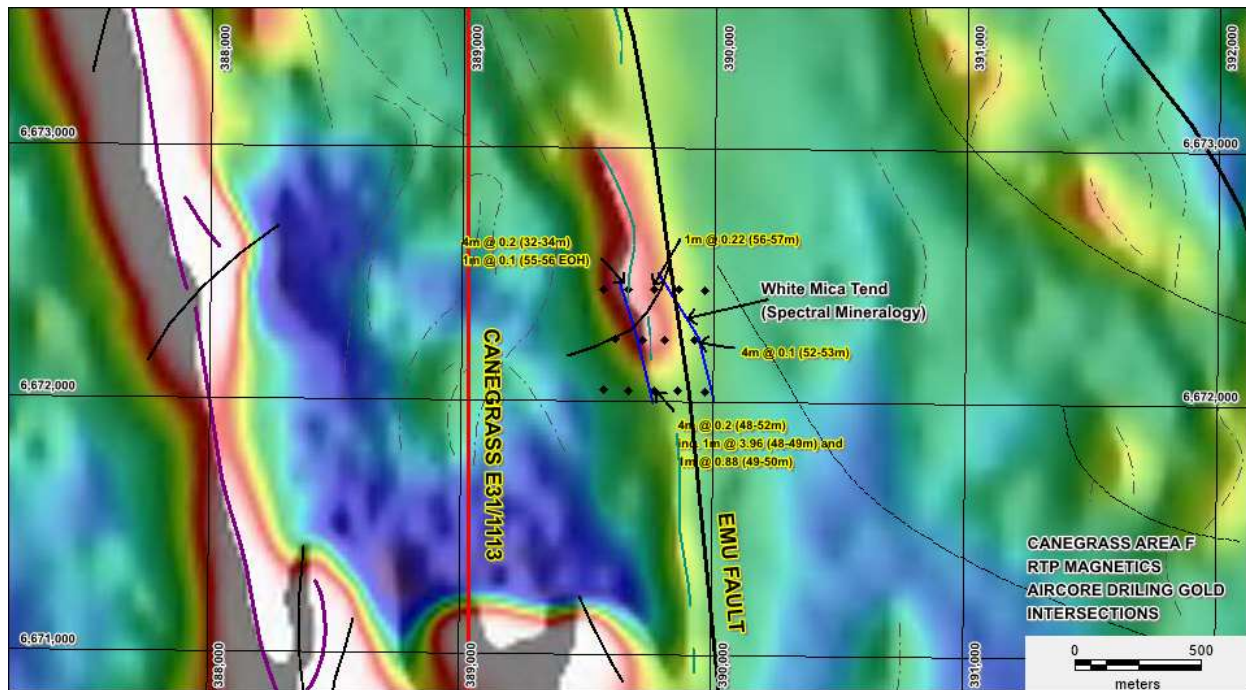


Figure 9: Canegrass CG_F Prospect showing significant Aircore gold drill intersections in yellow

The key gold mineralised intersections are shown in **Figure 8** on an RTP Aeromagnetic Image. A drill hole in the centre of the southernmost Aircore drilling program within CG_F intersected 4 m @ 0.16 g/t Au¹ from 48-52 m, which included 1m @ 3.96 g/t Au¹ (48-49 m) and 1m @ 0.88 g/t Au¹ (49-50 m) in Aircore Hole CGAC025 which was terminated at 63m down hole.

¹ see ASX Release of 3rd December 2020

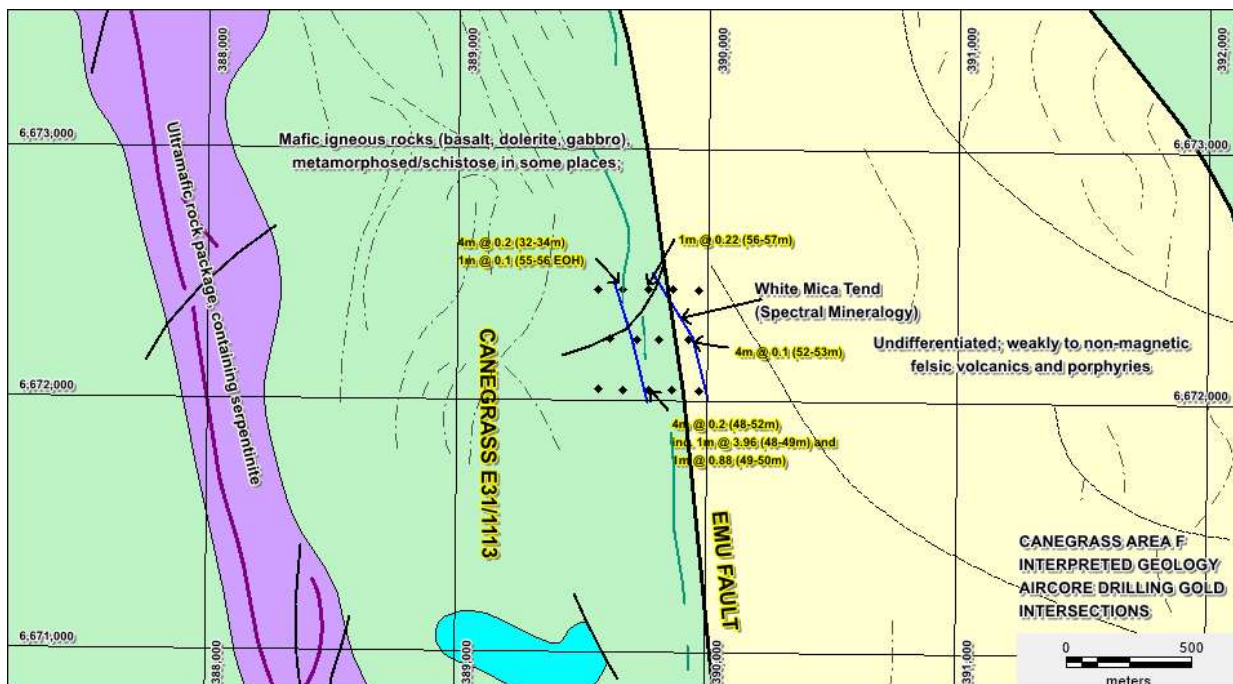


Figure 10: Canegrass CG_F Prospect with structures on interpreted geology

Figure 10 shows the interpreted geology for CG_A showing the Emu Fault located at the boundary of mafic dominant rocks (basalt and dolerite) to the west and felsic dominant (felsic volcanics and intrusives) rocks to the east. The significant gold intersections are located within the mafic dominant rocks where spectral mineralogy carried out on the drill pulps by ALS Laboratory as part of the geochemical analyses highlighted a white mica (sericite) trend adjacent to the Emu Fault. The program comprised of 3 lines of drilling (**Figure 8**) with one line the same as the southern line of the Aircore Program of 2020 with two further drill lines 50 m to the north and 50 m to the south.

Competent Person Statement

The information in the report above that relates to Exploration Results, Exploration Targets and Mineral Resources is based on information compiled by Mr Mark Derriman, who is the Company's Consultant Geologist and a member of The Australian Institute of Geoscientists (1566).

Mr Mark Derriman has sufficient experience that is relevant to the style of mineralization and type of deposit under consideration and to the activities which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Exploration Targets, Mineral Resources and Ore Reserves. Mr Mark Derriman consents to the inclusion in this report of matters based on his information in the form and context in which it appears.

Forward-Looking Statement

This document may include forward-looking statements. Forward-looking statements include, but are not limited to, statements concerning planned exploration program and other statements that are not historical facts. When used in this document, the words such as "could", "plan", "estimate", "expect", "intend", "may", "potential", "should" and similar expressions are forward-looking statements. Although Kaili Resources Limited believes that its expectations reflected in these forward looking statements are reasonable, such statements involve risks and uncertainties and no assurance can be given that actual results will be consistent with these forward-looking statements.

Authorised by

Long Zhao

Executive Director/Company Secretary

Contact details: Telephone +612 9241 5658 Email: contact@kailigroup.com.au

JORC Code, 2012 Edition – Table 1 Gindalbie Project_(Canegrass EL 31/1113) RC Drilling Results Received – March 2022

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	- Reverse Circulation (RC) drilling was used to obtain 1m individual samples and 4m composites from the entire hole with the samples collected in pre numbered calico sample bags. Following the receipt of geochemical results 1m sub sampling will be completed on selected 4m composites - The sampling technique was to obtain geochemical samples from the entire hole. - Representative samples were collected from every meter and stored in plastic chip trays
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	- Drilling was by RC Method - The target zone is the lower saprolite / fresh rock interval
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	RC chips were collected every meter and a representative portion of each 4 meter sample was composited into a single sample for assay purposes and geological logging
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	- All RC drill chips were geologically logged. - Every meter was stored in plastic chip trays

Criteria	JORC Code explanation	Commentary
	- Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	- A spear was used to collect the four meter composites - A duplicates and OREAS standards were inserted every 25th sample in the sequence Duplicate/OREAS standard/Duplicate/OREAS Standard etc. for the entire sampling of the 7 RC drill holes
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	- Each sample was submitted to ALS in Kalgoorlie for Au determination only by method Au AA23 -30g with AAS finish and by ME ICP 61 method for Ag Al As Ba Be Ca Cd Co Cr Cu Fe Ga - K La Li Mg Mn Mo Na Ni P Pb S Sb Sc Sr Th Ti Tl U V W Zn - pXRF-30 is a semi quantitative scan with precision and accuracy in the order of 20% depending on the sample type. A duplicate was inserted every 25th sample
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	Geochemical data generated by the sampling was checked by the Site Project Geologist
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	- All drill holes have been initially surveyed using a hand-held GPS accurate to 3 meters. - The grid system used in MGA 94, Zone 51.

Criteria	JORC Code explanation	Commentary
<i>Data spacing and distribution</i>	• <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i>	• Data spacing is appropriate for this stage of Exploration. • The drill spacing was designed to allow geochemical testing over broad areas • Three Drill lines were spaced 500m apart and holes drilled every 50m along the lines
<i>Orientation of data in relation to geological structure</i>	• <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	• The drillholes were inclined at -60 degrees and appropriate to test the base of saprolite/fresh rock interface
<i>Sample security</i>	• <i>The measures taken to ensure sample security.</i>	• All samples were secured by field geologist and delivered to the laboratory after the drill program was completed.
<i>Audits or reviews</i>	• <i>The results of any audits or reviews of sampling techniques and data.</i>	• The sampling techniques were reviewed by the principal of geological consulting company Rocktiger who supervised the work program

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	- Drilling was completed in EL31/1113 The tenements are owned by Kaili Gold Ltd, a subsidiary of Kaili Resources Ltd. - The tenements are located in Western Australia approximately 70 km south north of Kalgoorlie. - The locality of Kookynie within the Shire of Menzies is the nearest locality. - There are no JVs and Royalties - There is a current native title claim lodged by the Maduwongga People. A Heritage survey was completed across all drill areas before drilling commenced. All sites were cleared to be drilled
<i>Exploration done by other parties</i>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	- Previous exploration has been completed within the region and tenement footprint of EL 31/1113 and EL 27/550 - Rubicon drilled 1 line of (Rotary Air Blast Method) line in the north. The depth of drilling was between 15 and 70m as vertical holes. All holes were drilled in E27/550 - Mt Kersey Mining drilled 1 line of RAB in the north of E27/549 - Carrick Gold completed a small grid of auger drilling to 5m depth for Au and North Ltd completed a small amount of surface sampling, within E 27/550

Criteria	JORC Code explanation	Commentary
Geology	• <i>Deposit type, geological setting and style of mineralisation.</i>	• The exploration target is Archaean mafic and felsic volcanics
Drill hole Information	• <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> ○ <i>easting and northing of the drill hole collar</i> ○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> • <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	• Hole collar information is detailed in the text of the announcement. • Hole collar survey has been completed using a handheld GPS and accurate to 3m.
Data aggregation methods	• <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> • <i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> • <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	• N/A
Relationship between mineralisation widths and	• <i>These relationships are particularly important in the reporting of Exploration Results.</i> • <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i>	• All drill holes completed drilled at -60 degrees to the horizontal to test the lower saprolite/fresh rock interface

Criteria	JORC Code explanation	Commentary
<i>Intercept lengths</i>	If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	
<i>Diagrams</i>	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	A map showing the drill collars in relation to EL 31/113 is included in the announcement.
<i>Balanced reporting</i>	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced avoiding misleading reporting of Exploration Results.	Exploration results are included with this announcement.
<i>Other substantive exploration data</i>	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	All geological data collected as part of the drilling is included in this announcement.
<i>Further work</i>	- The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	The next phase of exploration is a full review of the drilling data and planning for deeper drill testing down dip and along strike

Sample ID	Hole ID	Au ppm	Au ppm	Ag ppm	Al %	As ppm	Ba ppm	Be ppm	Bi ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	Ga ppm	K %	La ppm	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	S %	Sb ppm	Sc ppm	Sr ppm	Th ppm	Ti %	Tl ppm	U ppm	V ppm	W ppm	Zn ppm	Sample
KLAC00585	CGR0C9	0.021		<0.5	6.7	17	230	0.6	<2	4.95	<0.5	9	271	31	8.85	20	0.24	<10	40	0.61	250	4	0.18	84	70	8	0.03	<5	10	153	<20	0.67	<10	<10	214	10	18	4m
KLAC00586	CGR0C9	0.018		<0.5	10.45	11	80	0.6	<2	0.16	<0.5	6	313	13	4.04	20	0.15	10	60	0.27	66	2	0.21	66	60	8	0.02	<5	16	25	<20	0.71	<10	<10	189	10	45	4m
KLAC00587	CGR0C9	0.005		<0.5	12.8	14	90	1.4	<2	0.02	<0.5	3	368	17	2.14	30	0.2	20	50	0.12	73	1	0.23	55	120	18	0.02	<5	23	19	<20	0.75	<10	<10	169	<10	86	4m
KLAC00588	CGR0C9	<0.005		<0.5	8.03	23	440	<0.5	<2	0.03	<0.5	<1	146	12	3.69	20	1.62	<10	20	0.23	59	1	0.2	3	50	3	0.03	<5	17	16	<20	0.28	<10	<10	194	<10	7	1m split
KLAC00589	CGR0C9	0.008		<0.5	9.43	8	470	<0.5	<2	0.08	<0.5	<1	159	9	3.96	20	1.59	<10	20	0.24	76	1	0.2	4	50	4	0.03	<5	20	14	<20	0.3	<10	<10	116	<10	10	1m split
KLAC00590	CGR0C9	0.005		<0.5	8.92	8	300	<0.5	<2	0.02	<0.5	<1	166	24	3.39	20	0.95	<10	20	0.15	76	2	0.16	10	50	6	0.02	<5	17	9	<20	0.24	<10	<10	99	<10	10	1m split
KLAC00591	CGR0C9	<0.005		<0.5	8.69	7	230	0.6	<2	0.02	<0.5	<1	196	82	6.45	20	0.73	<10	20	0.12	60	5	0.16	12	70	11	0.03	<5	19	8	<20	0.24	<10	<10	145	<10	17	1m split
KLAC00592	CGR0C9	0.005		<0.5	8.85	7	390	0.7	<2	0.02	<0.5	1	136	68	4.31	20	1.3	10	20	0.19	84	3	0.2	10	70	19	0.04	<5	21	13	<20	0.32	<10	<10	121	<10	18	4m
KLAC00593	CGR0C9	0.014		<0.5	8.78	5	280	1	19	0.02	<0.5	<1	121	140	5.66	20	1	<10	30	0.17	77	9	0.21	13	100	14	0.04	<5	22	9	<20	0.34	<10	<10	147	10	25	4m
KLAC00594	CGR0C9	0.015		<0.5	8.73	10	210	1	11	0.02	<0.5	<1	129	101	4.55	20	0.82	<10	30	0.15	64	4	0.23	13	120	24	0.04	<5	18	7	<20	0.37	<10	<10	140	10	20	4m
KLAC00595	CGR0C9	0.032		<0.5	8.03	8	340	1.3	<2	0.02	<0.5	<1	113	111	3.71	20	1.18	10	30	0.19	85	4	0.21	10	130	33	0.04	<5	18	8	<20	0.36	<10	<10	134	10	20	4m
KLAC00596	CGR0C9	0.02		0.6	7.57	16	280	1.9	4	0.02	<0.5	1	103	124	4.84	20	1.1	10	20	0.18	100	5	0.21	18	240	38	0.04	<5	17	14	<20	0.3	10	<10	130	10	23	4m
KLAC00597	CGR0C9	0.616		2.7	6.98	7	280	1.7	<2	0.03	<0.5	2	164	77	4.46	20	0.99	10	30	0.18	102	3	0.24	40	260	33	0.04	<5	17	17	<20	0.35	<10	<10	135	<10	22	4m
KLAC00598	CGR0C9	0.086		0.7	7.5	5	460	0.7	<2	0.02	<0.5	3	101	166	5.08	20	1.38	10	20	0.22	190	8	0.24	32	290	28	0.07	<5	17	18	<20	0.4	<10	<10	153	10	46	4m
KLAC00599	CGR0C9	0.014		<0.5	8.03	10	290	0.6	<2	0.03	<0.5	3	122	157	7.1	20	0.63	10	30	0.13	262	5	0.28	38	390	29	0.18	<5	15	30	<20	0.39	<10	<10	201	10	45	4m
KLAC00601	CGR0C9	0.03		<0.5	8.16	<5	340	0.5	<2	0.03	<0.5	19	258	103	3.64	20	0.7	10	40	0.23	299	3	0.29	67	310	10	0.25	<5	22	46	<20	0.4	<10	<10	183	10	50	4m
KLAC00602	CGR0C9	0.005		<0.5	8.75	<5	280	0.5	<2	0.03	<0.5	30	370	90	3.44	20	1.26	10	60	1.01	505	1	0.28	170	230	3	0.24	<5	31	61	<20	0.48	<10	<10	165	<10	148	4m
KLAC00603	CGR0C9	0.027		<0.5	8.97	<5	690	0.8	<2	0.21	<0.5	87	297	62	4.36	20	1.94	10	50	1.13	1450	1	0.68	361	320	4	0.04	<5	25	73	<20	0.46	<10	<10	145	10	195	4m
KLAC00604	CGR0C9	<0.005		<0.5	7.91	<5	180	0.5	<2	2.51	<0.5	47	303	65	5.24	10	1.59	10	50	2.57	778	<1	0.6	236	500	3	0.03	<5	25	47	<20	0.39	<10	<10	130	<10	129	4m
KLAC00605	CGR0C9	0.194		0.7	6.87	<5	290	0.5	<2	3.49	<0.5	50	265	64	6.16	10	1.82	10	50	3.28	1095	1	0.65	222	510	6	0.03	<5	21	65	<20	0.35	<10	<10	140	10	93	4m
KLAC00606	CGR0C9	0.139		1.4	7.79	<5	290	0.8	<2	3.02	<0.5	38	271	90	6.26	20	1.68	10	50	2.04	975	3	0.76	125	620	11	0.75	<5	23	105	<20	0.39	<10	<10	129	30	93	4m
KLAC00607	CGR0C9	0.042		<0.5	7.43	6	340	1.1	<2	3.3	<0.5	15	71	34	3.67	20	1.95	10	40	1.22	607	3	1.08	42	720	6	0.3	<5	10	126	<20	0.29	<10	<10	67	10	63	1m split
KLAC00608	CGR0C9	0.53		<0.5	6.87	6	310	0.8	<2	3.31	<0.5	12	48	19	3.15	20	2	10	40	1.11	568	3	1.36	28	670	10	0.25	<5	8	116	<20	0.27	<10	<10	57	10	58	1m split
KLAC00609	CGR0C9	0.407		<0.5	7.13	<5	300	0.8	2	3.28	<0.5	12	47	20	3.24	20	1.88	10	40	1.15	576	3	1.64	29	750	5	0.23	<5	8	125	<20	0.28	10	<10	57	10	66	1m split
KLAC00610	CGR0C9	0.048		<0.5	7.14	<5	310	0.8	<2	3.07	<0.5	12	45	15	3.26	20	1.78	20	50	1.09	573	2	1.86	27	710	3	0.14	<5	8	120	<20	0.27	<10	<10	55	<10	69	1m split
KLAC00611	CGR0C9	0.007		<0.5	7.06	<5	310	0.8	<2	3.15	<0.5	12	46	13	3.26	20	1.67	10	50	1.11	589	2	1.94	28	730	9	0.23	<5	8	134	<20	0.27	<10	<10	55	10	61	1m split
KLAC00612	CGR0C9	1.41		<0.5	6.71	5	310	0.7	<2	3.21	<0.5	12	51	16	3.28	20	1.93	20	50	1.36	601	4	1.3	30	890	5	0.22	<5	8	112	<20	0.27	<10	<10	59	10	67	1m split
KLAC00613	CGR0C9	0.01		<0.5	7.26	<5	370	0.8	2	3.23	<0.5	15	48	14	3.53	20	2.28	20	50	1.42	671	2	1.05	30	1070	6	0.28	<5	9	124	<20	0.31	<10	<10	60	10	74	1m split
KLAC00614	CGR0C9	0.01		<0.5	7.22	<5	300	0.8	<2	3.65	<0.5	11	43	19	3.31	20	2.05	20	50	1.42	664	2	1	28	790	8	0.27	<5	8	134	<20	0.26	<10	<10	53	10	67	1m split
KLAC00615	CGR0C9	0.011		<0.5	6.93	<5	260	0.8	<2	3.5	<0.5	12	44	19	3.15	20	1.54	10	50	1.18	588	3	1.37	27	700	6	0.15	<5	7	148	<20	0.26	<10	<10	52	10	73	4m
KLAC00616	CGR0C9	0.007		<0.5	6.96	7	260	0.8	<2	3.31	<0.5	9	44	4	2.87	20	1.43	10	60	1.32	680	3	1.34	25	730	7	0.03	<5	7	174	<20	0.25	<10	<10	50	10	57	1m split
KLAC00617	CGR0C9	<0.005		<0.5	7.34	<5	340	0.8	<2	2.83	<0.5	11	49	16	3.27	20	1.95	10	60	1.28	593	4	1.4	33	750	6	0.08	<5	8	178	<20	0.27	<10	<10	54	10	68	1m split
KLAC00618	CGR0C9	0.008		<0.5	6.98	<5	480	0.9	<2	3.19	<0.5	11	46	18	3.16	20	1.79	10	50	1.21	605	2	1.28	26	690	6	0.12	<5	8	185	<20	0.27	<10	<10	54	10	59	1m split
KLAC00619	CGR0C9	0.062		<0.5	6.95	<5	530	1.1	<2	2.34	<0.5	9	39	17	2.54	20	1.51	20	60	0.89	388	3	2.6	21	780	8	0.24	<5	6	195	<20	0.21	<10	<10	46	10	42	1m split
KLAC00620	CGR0C9	0.016		<0.5	7.14	<5	390	0.9	2	3.08	<0.5	12	44	23	3.26	20	1.56	20	60	1.11	541	2	2.09	26	760	8	0.14	<5	8	208	<20	0.27	10	<10	55	<10	67	1m split
KLAC00621	CGR0C9	0.017		<0.5	7.17	<5	320	0.8	<2	3.26	<0.5	13	44	25	3.22	20	1.46	10	50	1.08	542	2	2.13	26	730	8	0.16	<5	8	194	<20	0.26	<10	<10	53	10	66	1m split
KLAC00622	CGR0C9	0.02		<0.5	7.22	7	360	0.6	<2	8.04	<0.5	8	179	23	6.03	20	0.25	<10	30	0.89	212	3	0.14	62	90	9	0.04	<5	9	285	<20	0.63	<10	<10	135	10	14	4m
KLAC00623	CGR0C9	0.015		<0.5	10.4	<5	80	<0.5	<2	0.18	<0.5	4	99	9	5.12	30	0.3	10	40	0.29	61	6	0.17	40	50	6	0.02	<5	7	37	<							

KLAC00658	CGR0C8	<0.005		<0.5	7.84	<5	610	1.4	<2	0.84	<0.5	32	20	39	3.08	20	2.23	20	40	1.14	436	1	1.47	145	610	9	0.03	<5	10	182	<20	0.27	<10	<10	75	<10	82	1m split
KLAC00659	CGR0C8	0.517		<0.5	7.68	8	290	0.9	<2	1.1	<0.5	48	121	49	4.97	20	1.46	10	50	1.48	452	1	1.34	223	530	6	0.03	<5	15	156	<20	0.32	<10	<10	101	<10	72	4m
KLAC00660	CGR0C8	0.078		<0.5	7.74	6	710	0.9	<2	0.52	<0.5	41	72	31	3.75	20	2.93	20	50	1.04	381	1	1.17	171	590	7	0.09	<5	12	160	<20	0.33	<10	<10	91	10	65	4m
KLAC00661	CGR0C8	0.016		<0.5	7.88	<5	610	0.8	<2	1.56	<0.5	14	25	57	3.31	20	2.71	10	60	1.46	605	2	0.73	45	450	5	0.26	<5	11	122	<20	0.3	<10	<10	88	10	45	4m
KLAC00662	CGR0C8	0.024		<0.5	7.54	<5	390	0.8	<2	2.62	<0.5	13	23	32	4.36	20	2.29	10	70	1.37	855	2	0.73	42	370	8	0.43	<5	11	127	<20	0.3	10	<10	82	<10	59	4m
KLAC00663	CGR0C8	0.167		<0.5	7.74	<5	420	0.9	<2	3.02	1.5	19	32	49	4.31	20	2.15	10	60	1.25	825	2	1.15	55	460	5	0.76	<5	15	182	<20	0.3	<10	<10	91	10	85	4m
KLAC00664	CGR0C8	0.006		<0.5	7.03	<5	390	1	<2	4.95	0.5	23	130	31	5.91	20	1.27	30	50	2.26	1400	3	1.31	92	1320	8	0.42	<5	16	269	<20	0.4	<10	<10	112	10	75	2m
KLAC00665	CGR0C6	0.008	<0.5	6.07	<5	190	0.5	<2	4.6	<0.5	5	267	31	6.44	10	0.22	<10	20	0.54	213	1	0.18	43	100	7	0.03	<5	14	162	<20	0.34	<10	<10	197	<10	16	4m	
KLAC00666	CGR0C6	<0.005	<0.5	9.21	7	40	<0.5	<2	0.16	<0.5	<1	249	22	5.26	20	0.06	<10	20	0.15	117	1	0.19	22	30	4	0.02	<5	22	18	<20	0.49	<10	<10	132	<10	7	4m	
KLAC00667	CGR0C6	<0.005	<0.5	9.45	<5	130	0.5	<2	0.05	<0.5	<1	344	52	5.91	20	1.05	<10	40	1.16	341	<1	0.34	122	70	<2	0.03	<5	22	15	<20	0.44	10	<10	141	<10	85	4m	
KLAC00668	CGR0C6	<0.005	<0.5	8.89	6	210	0.5	<2	0.07	<0.5	18	321	59	5.52	20	1.04	20	40	0.93	302	<1	0.39	90	150	6	0.04	<5	23	24	<20	0.45	<10	<10	166	<10	86	4m	
KLAC00669	CGR0C6	0.005	<0.5	9.55	5	520	1.4	<2	0.08	<0.5	38	368	80	7.42	20	0.86	70	50	0.84	1295	3	0.38	127	580	14	0.05	<5	35	19	<20	0.51	<10	<10	226	<10	124	4m	
KLAC00670	CGR0C6	<0.005	<0.5	9.19	<5	450	1.3	2	0.04	<0.5	66	354	47	5.82	20	1.11	40	70	1.1	1810	2	0.37	125	320	4	0.04	<5	28	15	<20	0.48	<10	<10	184	<10	117	4m	
KLAC00671	CGR0C6	<0.005	<0.5	8.7	<5	700	3.1	<2	0.05	<0.5	86	399	72	7.29	20	1.35	50	70	1.2	2340	3	0.46	232	370	5	0.03	<5	31	31	<20	0.4	<10	<10	192	10	136	4m	
KLAC00672	CGR0C6	<0.005	<0.5	8.91	5	700	2.3	<2	0.05	<0.5	61	321	61	5.69	10	2.75	20	70	1.34	1780	1	0.45	181	230	4	0.03	<5	25	35	<20	0.39	<10	<10	167	10	123	4m	
KLAC00673	CGR0C6	<0.005	<0.5	8.49	5	260	1.1	<2	0.48	<0.5	37	335	47	4.8	20	1.75	10	60	1.75	1110	1	0.62	139	330	7	0.02	<5	23	31	<20	0.39	<10	<10	145	<10	88	4m	
KLAC00674	CGR0C6	<0.005	<0.5	8.28	<5	450	0.7	<2	0.49	<0.5	43	370	57	5.76	10	1.93	10	70	1.98	1805	1	0.53	137	510	9	0.02	<5	26	35	<20	0.39	10	<10	152	<10	87	4m	
KLAC00675	CGR0C6	0.032	<0.5	8.28	<5	440	0.7	<2	1.38	<0.5	44	377	63	5.99	20	1.79	10	70	2.15	1360	1	0.78	153	520	10	0.02	<5	32	62	<20	0.41	10	<10	161	10	81	4m	
KLAC00677	CGR0C6	0.036	<0.5	7.06	<5	260	0.5	<2	4.57	<0.5	29	247	39	4.69	10	1.37	10	60	3.45	876	<1	0.75	98	390	7	0.02	<5	22	67	<20	0.34	<10	<10	122	<10	63	4m	
KLAC00678	CGR0C6	0.018	<0.5	7.33	<5	220	0.6	<2	3.11	<0.5	23	212	39	4.4	10	1.44	10	50	2.07	602	1	1.19	70	580	6	0.01	<5	18	129	<20	0.33	<10	<10	107	<10	61	1m split	
KLAC00679	CGR0C6	0.076	<0.5	7	<5	250	0.6	<2	4.45	<0.5	24	197	34	4.81	10	1.23	10	40	2.56	827	1	1.36	74	550	3	0.01	<5	17	155	<20	0.31	10	<10	107	<10	66	1m split	
KLAC00680	CGR0C6	0.056	<0.5	5.65	<5	260	0.5	<2	7.09	0.7	30	197	38	5.3	10	1.06	<10	40	4.44	1660	1	0.95	88	370	4	0.01	<5	17	130	<20	0.27	<10	<10	124	<10	72	1m split	
KLAC00681	CGR0C6	0.012	1.9	7.5	8	280	0.7	<2	4.66	<0.5	29	281	36	6.19	10	1.25	10	50	2.77	903	1	1.28	78	480	<2	0.01	<5	22	157	<20	0.35	10	<10	155	<10	87	1m split	
KLAC00682	CGR0C6	0.005	1.3	7.67	<5	300	0.7	<2	3.07	<0.5	21	128	50	4.86	20	1.27	20	50	1.46	463	2	1.82	50	760	5	0.01	<5	13	159	<20	0.32	<10	<10	91	<10	69	1m split	
KLAC00683	CGR0C6	0.01	1.2	7.97	5	340	0.6	<2	3.22	<0.5	34	320	29	4.75	10	1.75	10	70	2.06	527	1	1.17	77	480	3	0.01	<5	23	158	<20	0.39	<10	<10	142	<10	78	1m split	
KLAC00684	CGR0C6	<0.005	<0.5	7.07	<5	310	0.7	<2	2.5	<0.5	10	49	15	3.36	20	1.52	10	60	1.2	473	1	1.68	24	690	4	0.03	<5	9	122	<20	0.27	<10	<10	59	10	64	1m split	
KLAC00685	CGR0C6	<0.005	<0.5	7.32	9	320	0.7	<2	2.4	<0.5	11	48	18	3.37	20	1.57	10	60	1.21	518	1	1.91	26	680	8	0.01	<5	9	119	<20	0.27	<10	<10	63	<10	77	1m split	
KLAC00686	CGR0C6	0.006	<0.5	7.21	5	270	0.7	<2	2.79	<0.5	11	40	22	3.39	20	1.48	20	60	1.36	625	1	2.06	27	790	6	0.01	<5	9	133	<20	0.27	<10	<10	62	10	69	1m split	
KLAC00687	CGR0C6	0.025	2.9	7.59	<5	330	0.8	<2	2.68	<0.5	9	39	26	3.48	20	1.62	20	50	1.2	551	1	2.12	24	810	5	0.03	<5	9	156	<20	0.27	<10	<10	70	<10	74	1m split	
KLAC00688	CGR0C6	0.005	0.7	7.25	<5	330	0.8	<2	2.71	<0.5	10	42	16	3.42	20	1.52	10	60	1.21	589	1	1.78	28	740	4	0.02	<5	8	157	<20	0.26	<10	<10	59	<10	69	1m split	
KLAC00689	CGR0C6	<0.005	0.5	6.73	6	280	0.7	<2	4.5	<0.5	12	34	24	3.22	10	1.28	20	50	2.02	889	1	1.68	27	720	5	0.02	<5	8	150	<20	0.25	<10	<10	53	<10	63	1m split	
KLAC00690	CGR0C6	<0.005	<0.5	7.62	<5	310	0.8	2	3.38	<0.5	14	61	29	3.7	20	1.39	20	50	1.28	657	2	2.45	34	730	5	0.16	<5	10	148	<20	0.29	<10	<10	62	<10	73	4m	
KLAC00691	CGR0C6	<0.005	<0.5	7.36	<5	270	0.7	<2	2.85	<0.5	14	51	24	3.47	20	1.32	20	50	1.35	647	2	2.71	28	730	6	0.19	<5	9	137	<20	0.28	<10	<10	58	10	68	4m	
KLAC00692	CGR0C6	<0.005	<0.5	7.42	<5	290	0.7	<2	2.59	<0.5	12	45	22	3.44	20	1.47	20	60	1.51	600	2	2.8	26	730	4	0.2	<5	8	121	<20	0.27	<10	<10	53	10	74	4m	
KLAC00693	CGR0C6	<0.005	<0.5	7.67	<5	330	0.7	<2	2.5	<0.5	14	51	42	3.49	20	1.85	20	80	1.84	640	1	2.32	27	720	3	0.13	<5	9	109	<20	0.28	<10	<10	57	10	222	4m	
KLAC00694	CGR0C6	<0.005	<0.5	7.52	<5	260	0.7	2	3.08	<0.5	16	69	19	4.26	20	1.46	10	80	1.83	748	1	2.02	35	800	7	0.29	<5	13	115	<20	0.45	<10	<10	94	10	78	4m	
KLAC00695	CGR0C6	0.005	<0.5	7.82	<5	150	0.7	3	4.38	<0.5	29	97	29	7.21	20	1.01	10	80	2.71	1220	2	1.22	53	940	6	0.41	<5	25	102	<20	0.85	<10	<10	184	10	73	4m	
KLAC00696	CGR0C6	<0.005	<0.5	8.24	<5	170	0.6	<2	3.05	<0.5	32	100	59	7.64	20	0.76	10	70	2.23	1085	1	1.72	60	990	8	0.73	<5	25	141	<20	0.9	<10	<10	185	10	96	4m	
KLAC00697	CGR0C6	<0.005	<0.5	7.45	<5	200	0.7	2	4.98	<0.5	30	51	92	7.66	20	1.08	10	80	2.44	1145	2	1.31	46	1030	8	1.17	<5	23	179	<20	0.92	<10	<10	190	10	102	2m	
KLAC006																																						

KLAC00733	CGR0C5	0.024	0.9	6.55	<5	140	0.6	<2	2.47	<0.5	49	290	68	6.48	10	1.75	10	60	2.54	1175	1	0.58	208	920	4	0.02	<5	24	61	<20	0.69	<10	<10	163	10	63			1m split	
KLAC00734	CGR0C5	0.007	1.9	6.86	<5	300	0.7	<2	1.52	<0.5	41	283	109	7.29	20	1.65	10	50	1.68	753	2	0.89	176	950	4	0.06	<5	26	95	<20	0.72	<10	<10	190	10	62			1m split	
KLAC00735	CGR0C5	0.008	0.8	7.46	<5	380	1	<2	3.25	<0.5	68	331	92	6.98	20	1.66	10	70	1.66	1100	2	0.62	235	950	8	0.84	<5	24	151	<20	0.76	<10	<10	175	20	67			1m split	
KLAC00736	CGR0C5	0.005	0.5	7.35	7	250	0.5	<2	6.58	<0.5	38	231	135	6.82	20	1.07	10	40	1.46	1555	3	0.41	140	820	7	0.71	<5	24	200	<20	0.75	<10	<10	180	10	55			1m split	
KLAC00737	CGR0C5	0.018	0.6	7.24	<5	360	0.6	<2	4.89	<0.5	39	241	130	5.95	20	1.66	10	60	1.88	1380	2	0.58	147	870	7	0.99	<5	25	184	<20	0.73	<10	<10	177	10	55			1m split	
KLAC00738	CGR0C5	<0.005	<0.5	7.72	<5	380	0.7	2	5.75	<0.5	30	264	29	5.29	20	1.41	10	50	2.17	1095	3	0.73	99	470	6	0.12	<5	20	257	<20	0.39	<10	<10	129	10	86			4m	
KLAC00739	CGR0C5	<0.005	<0.5	7.67	5	370	0.6	2	5.56	<0.5	32	319	49	5.29	10	1.28	<10	50	2.22	1170	2	1	92	370	5	0.09	<5	24	225	<20	0.36	<10	<10	140	10	114			4m	
KLAC00740	CGR0C5	<0.005	<0.5	7.6	<5	310	0.5	<2	5.57	<0.5	34	334	50	5.3	10	1.28	<10	50	2.46	1355	3	1.19	89	390	6	0.08	<5	24	180	<20	0.38	<10	<10	145	<10	124			4m	
KLAC00741	CGR0C5	<0.005	<0.5	7.51	<5	250	0.5	<2	5.15	<0.5	30	300	47	5.45	10	1.36	<10	60	2.75	1275	2	1.21	80	360	6	0.07	<5	22	160	<20	0.36	<10	<10	139	<10	143			4m	
KLAC00742	CGR0C5	<0.005	<0.5	7.78	<5	300	0.6	<2	4.66	<0.5	40	300	51	6.43	10	1.81	<10	80	2.07	1365	2	0.95	153	460	6	0.2	<5	27	143	<20	0.45	<10	<10	155	10	125			4m	
KLAC00743	CGR0C5	<0.005	<0.5	7.71	<5	330	1	4	5.59	<0.5	33	207	60	5.66	20	1.47	10	70	1.42	1230	1	1.06	107	630	8	0.3	<5	27	164	<20	0.55	<10	<10	165	<10	92			2m	
KLAC00744	CGR0C4	0.027		<0.5	5.26	6	290	0.6	<2	6.9	<0.5	9	169	27	4.8	20	0.33	<10	20	0.95	234	2	0.21	62	80	6	0.04	<5	10	236	<20	0.29	<10	<10	111	10	20			4m
KLAC00745	CGR0C4	0.012		<0.5	8.47	<5	110	<0.5	<2	0.2	<0.5	2	73	7	3.39	30	0.32	10	30	0.26	42	3	0.17	23	50	4	0.01	<5	6	31	<20	0.5	<10	<10	97	10	5			4m
KLAC00746	CGR0C4	0.007		<0.5	9.3	<5	130	<0.5	<2	0.03	<0.5	1	118	10	4.87	20	0.58	10	30	0.15	127	2	0.12	18	60	9	0.03	<5	9	24	<20	0.56	<10	<10	116	<10	16			4m
KLAC00747	CGR0C4	0.006		<0.5	7.21	<5	110	<0.5	<2	0.09	<0.5	1	121	5	1.48	10	1.08	<10	30	0.08	208	2	0.14	16	30	7	0.01	<5	8	22	<20	0.27	<10	<10	40	10	25			4m
KLAC00748	CGR0C4	<0.005		<0.5	5.7	<5	60	0.6	<2	0.09	<0.5	1	45	16	2.56	10	0.75	<10	30	0.07	375	2	0.16	22	140	5	0.01	<5	7	18	<20	0.22	<10	<10	42	<10	36			4m
KLAC00749	CGR0C4	0.006		<0.5	6.02	<5	50	0.7	<2	0.67	<0.5	1	34	9	1.76	10	0.41	<10	60	0.06	354	1	0.19	14	100	4	0.01	<5	7	30	<20	0.24	<10	<10	31	<10	24			4m
KLAC00751	CGR0C4	<0.005		<0.5	5.52	<5	30	1	<2	0.46	<0.5	1	28	16	2.86	10	0.25	<10	50	0.07	411	1	0.15	29	210	3	0.01	<5	7	18	<20	0.24	<10	<10	33	<10	32			4m
KLAC00752	CGR0C4	<0.005		<0.5	6.08	<5	80	1.1	<2	0.12	<0.5	2	37	19	2.94	10	1.19	20	30	0.07	288	1	0.22	33	240	5	0.01	<5	8	25	<20	0.23	<10	<10	39	10	34			4m
KLAC00753	CGR0C4	<0.005		<0.5	7.38	<5	130	1.5	<2	0.02	<0.5	2	159	33	3.75	20	2.02	30	20	0.11	293	2	0.27	56	390	9	0.02	<5	9	37	<20	0.29	<10	<10	56	20	47			4m
KLAC00754	CGR0C4	<0.005		<0.5	6.63	<5	100	1.2	<2	0.02	<0.5	3	38	15	2.05	20	2.24	20	20	0.2	184	1	0.22	27	190	4	0.01	<5	5	24	<20	0.23	<10	<10	38	<10	34			4m
KLAC00755	CGR0C4	<0.005		<0.5	7.3	<5	150	1.1	<2	0.02	<0.5	2	29	18	1.96	20	2.64	10	30	0.31	244	1	0.23	24	130	6	0.01	<5	6	18	<20	0.26	<10	<10	46	10	43			4m
KLAC00756	CGR0C4	<0.005		<0.5	7.43	<5	150	0.7	<2	0.01	<0.5	4	26	17	1.84	20	3.17	10	20	0.4	283	<1	0.25	20	90	4	0.01	<5	5	23	<20	0.26	<10	<10	42	10	49			4m
KLAC00757	CGR0C4	0.006		<0.5	7.81	<5	140	1	<2	0.02	<0.5	7	30	27	2.84	20	2.47	20	60	0.74	467	<1	0.26	35	140	5	0.02	<5	6	21	<20	0.27	<10	<10	43	<10	98			4m
KLAC00758	CGR0C4	<0.005		<0.5	7.37	<5	130	0.7	<2	0.02	<0.5	6	26	16	2.15	20	1.98	10	60	0.67	454	<1	0.25	29	100	4	0.02	<5	6	13	<20	0.23	<10	<10	38	<10	71			4m
KLAC00759	CGR0C4	<0.005		<0.5	7.41	<5	180	0.8	<2	0.14	<0.5	6	27	23	1.93	20	1.84	10	40	0.75	503	<1	0.35	38	220	5	0.03	<5	7	23	<20	0.2	<10	<10	43	10	49			4m
KLAC00760	CGR0C4	0.242		<0.5	8.46	<5	170	1.4	4	1.37	<0.5	12	185	40	4.11	20	1.43	30	40	1.41	870	1	1.01	86	1470	9	0.02	<5	14	81	<20	0.38	<10	<10	63	10	67			1m split
KLAC00761	CGR0C4	0.009		<0.5	7.66	<5	160	0.8	2	0.83	<0.5	9	25	30	4.84	20	1.96	20	40	1.33	1540	1	0.61	49	690	4	0.02	<5	7	50	<20	0.27	<10	<10	52	<10	87			1m split
KLAC00762	CGR0C4	<0.005		<0.5	8.14	<5	160	0.7	3	0.92	<0.5	9	24	8	4.08	20	1.91	20	40	1.13	1270	1	0.67	43	730	5	0.02	<5	6	61	<20	0.29	<10	<10	41	<10	75			1m split
KLAC00763	CGR0C4	0.005		<0.5	8	<5	120	0.8	2	1.78	<0.5	9	25	15	4.26	20	1.84	20	40	1.27	1240	1	1.14	37	720	8	0.01	<5	7	107	<20	0.29	<10	<10	45	<10	80			1m split
KLAC00764	CGR0C4	0.233		<0.5	7.66	<5	110	1	3	1.88	<0.5	12	36	20	2.88	20	1.34	10	30	1	1020	2	1.53	36	740	10	0.01	<5	7	139	<20	0.27	<10	<10	51	10	65			1m split
KLAC00765	CGR0C4	0.133		<0.5	7.59	<5	180	1.2	<2	1.25	<0.5	7	38	6	1.51	20	2.07	10	20	0.44	584	2	1.28	20	730	8	0.01	<5	4	144	<20	0.27	<10	<10	41	10	28			1m split
KLAC00766	CGR0C4	0.179		<0.5	6.5	<5	150	1.1	<2	1.08	<0.5	14	34	23	3.01	20	1.18	10	30	0.91	1845	2	1.18	48	460	8	0.04	<5	5	159	<20	0.19	<10	<10	51	20	65			1m split
KLAC00767	CGR0C4	0.08		<0.5	7.71	<5	120	1.5	<2	1.96	<0.5	9	37	18	2.37	20	0.92	20	20	0.76	1100	5	2.1	34	490	10	0.01	<5	5	244	<20	0.26	<10	<10	54	20	54			1m split
KLAC00768	CGR0C4	0.139		<0.5	8.47	<5	100	1.1	<2	0.98	<0.5	9	37	10	4.43	20	1.89	20	30	1.29	1955	3	1.19	26	700	11	0.01	<5	7	188	<20	0.28	<10	<10	50	10	101			1m split
KLAC00769	CGR0C4	0.456		<0.5	7.89	<5	130	0.9	3	0.44	<0.5	9	32	16	3.9	20	2.48	20	30	0.97	2110	1	0.7	23	720	11	0.01	<5	7	148	<20	0.29	<10	<10	49	10	77			1m split
KLAC00770	CGR0C4	0.158		<0.5	7.66	<5	160	0.9	2	0.28	<0.5	6	33	18	2.92	20	2.88	10	20	0.62	1315	2	0.57	22	630	11	0.01	<5	6	144	<20	0.28	<10	<10	46	10	49			1m split
KLAC00771	CGR0C4	0.511		0.9	6.63	<5	160	1	<2	0.46	<0.5	8	32	14	3.08	20	2.53	10	20	0.51	1380	2	0.74	27	650	13	0.09	<5	6	164	<20	0.24	<10	<10	50	10	46			1m split

KLAC00808	CGR02	0.009		<0.5	8.99	6	400	2	<2	3.54	<0.5	29	179	20	1.56	20	1.72	10	40	0.57	497	6	3.51	156	1110	8	0.09	<5	14	189	<20	0.62	<10	<10	164	10	19	1m split
KLAC00809	CGR02	0.032		<0.5	8.56	<5	440	1.1	<2	4.22	<0.5	44	204	127	2.9	20	1.68	10	70	0.99	932	4	2.41	167	1080	7	0.22	<5	24	180	<20	0.77	<10	<10	198	10	31	1m split
KLAC00810	CGR02	0.006		<0.5	7.93	<5	260	0.9	2	5.24	<0.5	38	296	49	4.2	10	1.15	10	60	1.48	1265	4	1.2	196	1390	5	0.26	<5	21	174	<20	0.69	10	10	167	10	46	1m split
KLAC00811	CGR02	0.015		<0.5	7.74	5	290	0.7	3	5.96	<0.5	41	393	65	6.7	10	1.42	10	80	2.76	1565	4	0.76	151	1030	7	0.24	<5	27	177	<20	0.57	<10	<10	185	10	93	4m
KLAC00812	CGR02	0.028		<0.5	7.38	<5	320	1.5	3	5.19	<0.5	37	339	108	6.96	10	1.44	10	90	3.09	1230	5	0.92	123	920	7	0.25	<5	26	189	<20	0.61	10	<10	181	20	99	4m
KLAC00813	CGR02	0.009		<0.5	7.5	<5	290	1	2	5.55	<0.5	44	126	142	7.53	20	1.46	10	90	2.92	1230	4	0.81	77	820	9	0.29	<5	24	178	<20	0.74	<10	<10	180	120	81	4m
KLAC00814	CGR02	0.021		<0.5	7.09	<5	230	0.7	<2	5.25	<0.5	35	141	58	6.9	10	1.22	10	90	3.59	1295	5	1.09	94	730	8	0.13	<5	22	169	<20	0.67	<10	<10	165	20	96	2m
KLAC00815	CGR01	0.024		<0.5	6.58	7	370	0.5	<2	7.23	<0.5	7	341	25	9.15	20	0.26	10	20	0.86	170	3	0.18	78	100	7	0.04	<5	10	255	<20	0.55	<10	10	209	10	18	4m
KLAC00816	CGR01	0.016		<0.5	11	<5	60	<0.5	<2	0.15	<0.5	6	273	15	6.79	20	0.23	<10	60	0.33	96	3	0.23	85	40	3	0.01	<5	7	34	<20	1	<10	<10	147	20	12	4m
KLAC00817	CGR01	0.007		<0.5	10.15	<5	130	<0.5	<2	0.05	<0.5	3	145	15	3.04	20	0.75	10	80	0.16	170	3	0.2	36	50	8	0.02	<5	7	19	<20	0.6	<10	<10	112	10	18	4m
KLAC00818	CGR01	0.005		<0.5	9.03	<5	150	0.8	<2	0.05	<0.5	2	85	13	1.07	20	1.4	10	60	0.14	125	3	0.22	35	50	5	0.02	<5	7	20	<20	0.25	<10	<10	39	10	15	4m
KLAC00819	CGR01	<0.005		<0.5	8.64	<5	160	1.3	<2	0.02	<0.5	4	114	37	3.18	20	1.52	20	40	0.13	237	4	0.25	101	190	13	0.02	<5	10	27	<20	0.28	<10	<10	56	10	34	4m
KLAC00820	CGR01	0.009		<0.5	9.88	<5	200	2.2	<2	0.04	<0.5	6	148	48	4.55	20	2.13	20	30	0.17	308	5	0.33	105	270	14	0.03	<5	18	36	<20	0.35	<10	<10	73	10	43	4m
KLAC00821	CGR01	0.051		<0.5	9.06	8	280	2.1	<2	0.04	<0.5	6	114	33	3.38	20	2.26	60	30	0.18	343	4	0.33	59	260	17	0.02	<5	12	46	<20	0.27	<10	<10	61	10	36	4m
KLAC00822	CGR01	0.008		<0.5	8.22	<5	230	2.9	2	0.06	<0.5	10	403	56	5.05	20	1.42	140	20	0.38	287	4	0.38	140	380	18	0.02	<5	15	47	<20	0.23	<10	<10	84	10	75	4m
KLAC00823	CGR01	0.012		<0.5	8.75	6	240	1.7	<2	0.03	<0.5	7	119	20	2.7	20	2.82	20	20	0.39	404	2	0.4	80	160	11	0.01	<5	7	60	<20	0.31	<10	<10	64	10	104	4m
KLAC00824	CGR01	0.017		<0.5	8.49	6	260	2.6	<2	0.03	<0.5	19	237	38	3.76	20	1.92	30	30	0.72	1215	3	0.53	131	280	12	0.01	<5	10	78	<20	0.33	<10	<10	90	20	142	4m
KLAC00825	CGR01	0.091		<0.5	7.67	6	190	2	3	0.03	<0.5	14	390	47	3.16	20	1.48	50	30	1.03	787	3	0.52	122	210	9	0.01	<5	9	72	<20	0.24	10	<10	77	10	157	1m split
KLAC00827	CGR01	0.009		<0.5	8.19	<5	320	1.1	<2	0.02	<0.5	9	114	19	1.79	20	2.19	20	20	0.48	343	2	0.54	53	80	11	0.01	<5	5	100	<20	0.2	<10	<10	41	10	57	1m split
KLAC00828	CGR01	0.008		<0.5	7.37	<5	340	1.1	<2	0.04	<0.5	9	191	16	1.88	20	1.86	20	20	0.62	348	2	0.55	63	80	9	0.01	<5	6	102	<20	0.2	<10	<10	46	10	70	1m split
KLAC00829	CGR01	0.006		<0.5	7.62	<5	200	0.9	<2	0.09	<0.5	5	45	11	1.04	20	1.5	20	10	0.14	149	2	0.63	20	60	10	0.01	<5	5	119	<20	0.18	<10	<10	33	<10	19	1m split
KLAC00830	CGR01	0.006		<0.5	7.48	<5	170	0.9	<2	0.11	<0.5	6	40	10	1.08	20	1.42	20	10	0.09	125	2	0.69	16	60	10	0.01	<5	4	124	<20	0.18	<10	<10	31	10	15	1m split
KLAC00831	CGR01	0.006		<0.5	6.98	<5	90	1.1	<2	0.09	<0.5	5	44	10	1.17	20	1	20	20	0.08	265	3	0.69	22	80	12	0.01	<5	3	111	<20	0.18	<10	<10	33	10	19	1m split
KLAC00832	CGR01	0.032		<0.5	6.24	<5	60	0.7	<2	0.08	<0.5	9	41	9	1.14	10	0.53	20	10	0.11	318	4	0.32	23	260	6	0.01	<5	4	48	<20	0.17	<10	<10	31	10	22	1m split
KLAC00833	CGR01	0.077		<0.5	6.77	<5	50	0.7	<2	0.13	<0.5	8	26	9	1.03	10	0.65	10	10	0.08	285	3	0.52	17	280	7	0.01	<5	3	75	<20	0.17	<10	<10	30	10	12	1m split
KLAC00834	CGR01	0.087		<0.5	7.54	<5	120	0.9	<2	0.18	<0.5	4	32	20	1.63	20	1.59	10	20	0.16	219	3	0.86	18	260	10	0.02	<5	5	149	<20	0.19	<10	<10	36	10	23	1m split
KLAC00835	CGR01	0.109		<0.5	8.06	5	230	0.9	<2	0.27	<0.5	9	40	13	1.59	20	2.15	20	20	0.32	326	3	0.86	22	580	13	0.01	<5	5	170	<20	0.25	<10	<10	44	10	25	1m split
KLAC00836	CGR01	0.604		<0.5	6.95	<5	160	1.2	<2	1.68	<0.5	35	584	42	4.24	10	0.48	20	30	2.41	1085	3	1.28	246	980	10	0.01	<5	14	195	<20	0.17	<10	<10	50	10	74	1m split
KLAC00837	CGR01	1		<0.5	6.21	<5	40	0.7	2	2.45	<0.5	43	1220	31	7.86	10	0.19	30	40	5.19	855	1	0.76	561	1670	7	0.01	<5	27	44	<20	0.18	<10	<10	74	<10	128	1m split
KLAC00838	CGR01	0.23		<0.5	6.56	<5	380	1.2	<2	2.23	<0.5	65	588	55	4.27	10	0.31	30	40	2.89	2780	2	1.14	284	1170	12	0.01	<5	15	162	<20	0.16	<10	<10	49	10	105	1m split
KLAC00839	CGR01	0.059		<0.5	7.25	<5	380	1.1	<2	1.06	<0.5	15	56	9	1.46	20	1.84	20	20	0.56	747	2	1.36	38	610	14	0.01	<5	5	183	<20	0.2	<10	<10	44	10	30	1m split
KLAC00840	CGR01	0.177		<0.5	7.75	<5	230	1	<2	1.49	<0.5	9	66	21	2.91	20	1.44	20	20	0.69	1125	2	1.44	38	460	9	0.04	<5	6	171	<20	0.23	<10	<10	47	10	61	1m split
KLAC00841	CGR01	0.098		<0.5	7.34	<5	240	1	<2	1.59	<0.5	10	39	20	1.92	20	1.58	20	20	0.42	1015	2	1.48	28	280	11	0.02	<5	5	188	<20	0.22	<10	<10	50	10	42	1m split
KLAC00842	CGR01	0.061		<0.5	7.6	<5	230	1.1	<2	1.98	<0.5	6	42	22	2.27	20	1.38	10	20	0.48	1025	3	1.56	30	350	10	0.01	<5	5	191	<20	0.23	<10	<10	50	10	52	1m split
KLAC00843	CGR01	0.24		<0.5	7.87	5	270	1	2	1.65	<0.5	12	49	25	3.28	20	1.52	10	20	0.46	1425	3	1.28	46	280	8	0.01	<5	6	171	<20	0.23	<10	<10	52	<10	58	1m split
KLAC00844	CGR01	0.034		<0.5	7.78	<5	210	0.7	<2	2.11	<0.5	8	39	17	2.18	20	1.06	20	20	0.45	872	4	1.62	22	470	12	0.03	<5	5	214	<20	0.23	<10	<10	42	10	37	1m split
KLAC00845	CGR01	0.04		<0.5	7.11	<5	180	0.7	<2	2.24	<0.5	5	35	8	1.86	20	0.8	10	10	0.41	692	3	1.7	13	460	10	0.01	<5	4	209	<20	0.2	<10	<10	38	10	30	1m split
KLAC00846	CGR01	0.025		<0.5	7.03	<5	170	0.6	<2	2.32	<0.5	3	34	10	1.82	20	0.86	10	20	0.38	698	3	1.5	13	540	11	0.02	<5	4	196	<20	0.23	<10	<10	38	<10	31	1m split
KLAC00847	CGR01	0.129		<0.5	7.36	<5	240	0.7	2	2.1	<0.5	6	39	8	1.62	20	1.15	10	20	0.3	637	2	1.67	18	500	10	0.01	<5	5	209	<20	0.23	<10	<10	40	<10	28	1m split
KLAC00848	CGR01	0.056																																				